


Oskar Hızlı Geçiş Turnike FCT D

Flap Gate Turnstiles

FCT -260 D




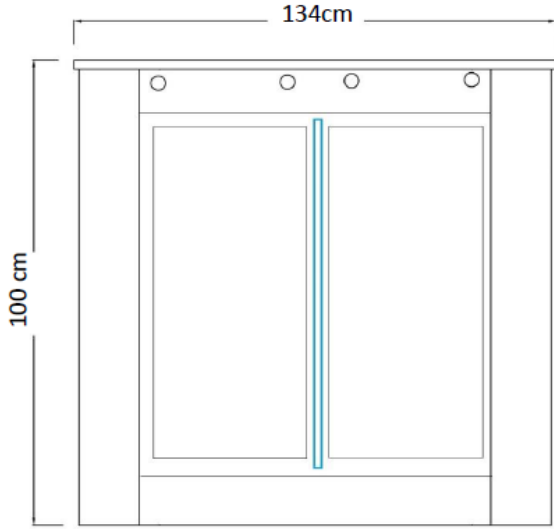


Teknik Özellikler

Enerji	220V AC 50-60Hz
Güç Tüketimi	Maks. 20W Min 10W AKIM TÜRÜ VE DEĞERİ 2A
SICAKLIK	-20 +45 / ÇALIŞMA NEMİ %95MAX.
GÜVENLİK SINIFI	IP 55
Kontrol	Kart - Parmakizi – Yüz Tanıma – Kontrol- Kuru kontak
GARANTİ	GARANTİ SÜRESİ 2 YIL / KULLANIM SÜRESİ 10 YIL
Acil durum	Enerji Kesildiğinde, Akü Desteksiz El İle Açılabilme

Technical Specifications

Energy	220V AC 50-60Hz
Energy Consumption	Maks. 20W Min 10W CURRENT TYPE AND VALUE 2A
TEMPERATURE	20 +45 OPERATING HUMIDITY 95% MAX
SAFETY CLASS	IP 55
Control	D – Fingerprint – Face – Short -Dry Contact
WARRANTY	WARRANTY PERIOD 2 YEARS /USAGE PERIOD 10 YEARS
EMERGENCY	Turns to Both Sides on Ignition or Power Off
WARRANTY	WARRANTY PERIOD 2 YEARS /USAGE PERIOD 10 YEARS
EMRGENCY	When the Power is Cut, The Battery Can Be Opened Manually Without Suppor

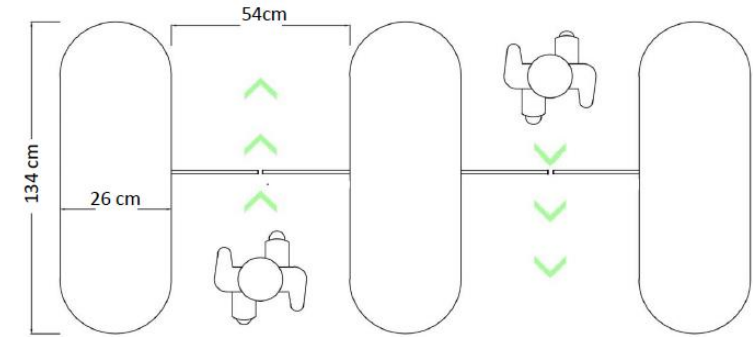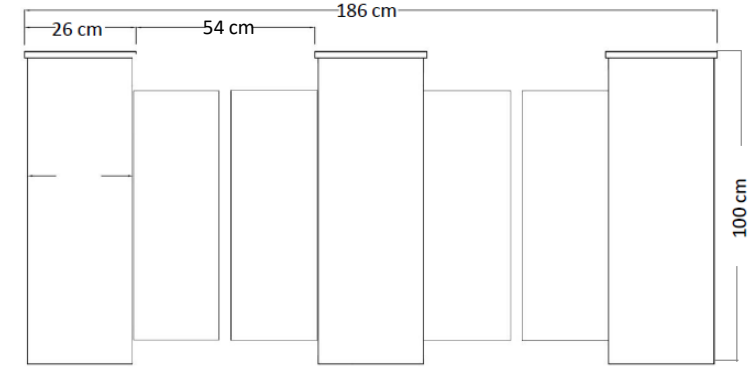

Kasa

304 Kalite Paslanmaz Çelik Gövde ve Cam Tabla
10mm Temper Cam
Giriş ve Çıkış Tarafında İki Renkli Göstergeler Mevcut
Kuru Kontak / Her Türlü Kartlı Geçiş Sistemi İle Çalışır
12adet Karşılıklı Fotosel, Sıkışma Anında Geri Gelebilde

Opsiyonlar

Sesli uyarı
Led aydınlatma
Uzaktan kumanda ve alıcı
Dijital sayaç
Elektrostatik toz boya (RAL veya PANTONE)

Fame

304 Quality Stainless Steel Body and Glass Table
10mm Temper Glass
Two Color Indicators Available on Input and Output
Dry Contact / All Kinds of Access Control System
12 Photocells, Recovery When jamming

Options

Sound alert
Led lid
Remote control and receiver
Digital counter
Electrostatically paint (RAL or PANTONE)